



0817 External micrometers with wide range of applications 100 mm



DIN
863-3



2

Model

- DIN 863-3
- Direct reading 0.01 mm, without addition because of thread pitch 1 mm
- Reading parts are satin chrome finished
- Spindle adjustment 50 mm
- Reversible anvil (screwed) for measuring range extension
- Locking ring

Delivery


- Wooden case

- Ratchet stop
- Carbide measuring faces
- Thermally insulated
- Robust coated light alloy frame

⏏	⚙	Measuring range mm	Pitch mm	Spindle dia. mm	Thimble dia. mm	Error limit mm	Order no.	List price EUR
		200 - 300	1	10	24	0.006	0817 512	1120.00
		300 - 400	1	10	24	0.007	0817 514	1165.00
		400 - 500	1	10	24	0.008	0817 516	1304.00
		500 - 600	1	10	24	0.009	0817 518	1480.00
		600 - 700	1	10	24	0.009	0817 520	1655.00
	▪	700 - 800	1	10	24	0.009	0817 522	1836.00
	▪	800 - 900	1	10	24	0.01	0817 524	2021.00
	▪	900 - 1000	1	10	24	0.01	0817 526	2236.00



0819 External micrometers with interchangeable inserts

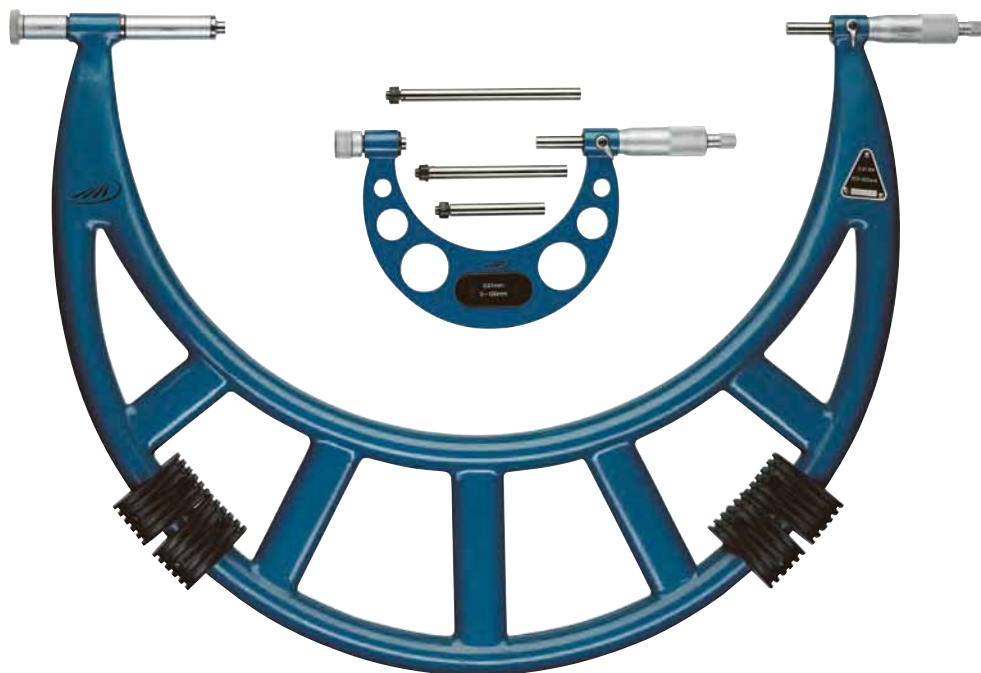

Model

- Reading: 0.01 mm
- Reading parts are satin chrome finished
- Locking lever
- Ratchet stop
- Carbide measuring faces
- Thermally insulated
- Coated malleable cast iron frame* or coated light alloy frame with interchangeable anvil

Delivery

- Wooden case
- Includes setting standards

✕	¼	Measuring range mm	Pitch mm	Spindle dia. mm	Thimble dia. mm	Order no.	List price EUR
		0 - 100	0.5	8	20	0819 501	184.00
		0 - 150	0.5	8	20	0819 502	205.00
		100 - 200	0.5	8	20	0819 503	227.00
		150 - 300	0.5	8	20	0819 505	259.00
		200 - 300	0.5	8	20	0819 510	249.00
		300 - 400	0.5	8	24	0819 511	314.00
		400 - 500	0.5	8	24	0819 512	357.00
		500 - 600	0.5	8	24	0819 513	412.00
		600 - 700	0.5	8	24	0819 514	508.00
	▪	700 - 800	0.5	8	24	0819 515	585.00
	▪	800 - 900	0.5	8	24	0819 516	671.00
	▪	900 - 1000	0.5	8	24	0819 517	758.00
	▪	1000 - 1200	1	8	30	0819 519	1408.00
	▪	1200 - 1400	1	8	30	0819 521	1516.00
	▪	1400 - 1600	1	8	30	0819 523	1786.00
	▪	1600 - 1800	1	8	30	0819 525	2052.00
	▪	1800 - 2000	1	8	30	0819 527	2360.00