




## 1326i DIGI-MET® Pocket calipers IP67 with integrated wireless

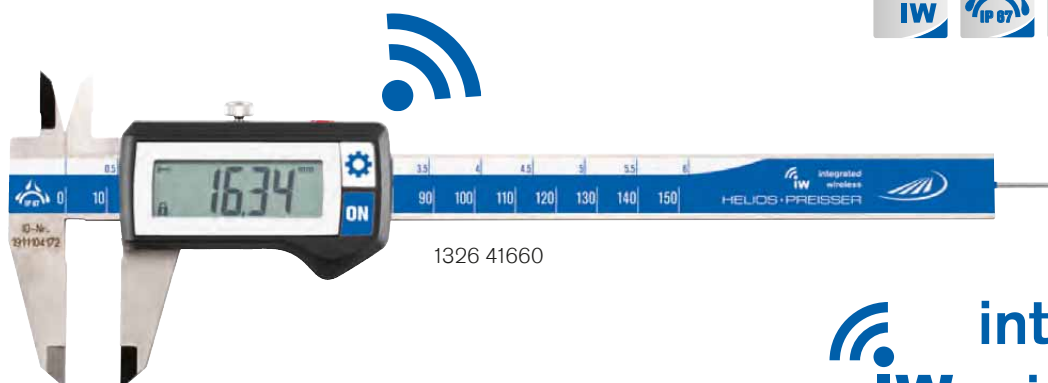

1326 41660

## integrated IW wireless

Wireless Data Transmission

### Model

- Measuring system is insensitive to cooling agents and dust
- Protection class IP67
- Stainless steel
- LCD display 11 mm
- DIN 862
- Housing and operating keys have an excellent chemical resistance
- Locking screw
- Inside cross points
- Four way measurements

### Functions

- ON / OFF
- Quick-Start**
- Quick-Lock** (key lock)
- Set to zero at any point
- mm / inch switching
- PRESET-Function (setting a numerical value)
- Integrated Wireless

### Delivery

- Plastic case



More information on our i-series and Integrated Wireless on page 252

✕	📏	Measuring range		Jaw length		Reading		Error limit	Depth gauge	Order no.	List price EUR
		mm	inch	mm	inch	mm	inch				
▪		0 - 150	0 - 6	40	1.6	0.01	.0005	0.03	round 1.5	1326 41660	218.00
▪		0 - 150	0 - 6	40	1.6	0.01	.0005	0.03	rectangular	1326 41760	218.00
▪		0 - 200	0 - 8	50	2.0	0.01	.0005	0.03	rectangular	1326 41860	279.00
▪		0 - 300	0 - 12	65	2.5	0.01	.0005	0.03	none	1326 42260	337.00



1998780

### Accessories

	Order no.	List price EUR
Battery, 3V-Lithium, CR 2032	0220 704	3.90
i-Stick USB-receiver for Integrated Wireless	1998 780	95.00

Integrated Wireless is intended to be sold within the European Economic Area only



# HELIOS · PREISSER

## 1320 DIGI-MET® Pocket calipers



1320 416



1320 517



### Model

- Inductive measuring system, resistant to moisture and sweat
- Stainless steel
- LCD display 11 mm without data output, 7.5 mm with data output
- DIN 862
- Locking screw
- Inside cross points

- Four way measurement with measuring ranges 150 and 200 mm
- Three way measurement with measuring range 300 mm

### Functions

- ON / OFF
- **Quick-Start**
- **Quick-Lock** (key lock)
- Set to zero at any point
- mm / inch switching
- PRESET-Function (setting a numerical value 1320 4xx only)
- Variable data output RS 232 + Digimatic + USB (1320 5xx only)

### Delivery

- Plastic case



Video electronic

▶▶	Measuring range		Jaw length		Reading		Error limit	Depth gauge	Order no.	List price EUR
	mm	inch	mm	inch	mm	inch				
<b>Without data output</b>										
▪	0 - 150	0 - 6	40	1.6	0.01	.0005	0.03	round 1.5	1320 416	115.00
▪	0 - 150	0 - 6	40	1.6	0.01	.0005	0.03	rectangular	1320 417	115.00
<b>With DATA VARIABLE</b>										
▪	0 - 150	0 - 6	40	1.6	0.01	.0005	0.03	round 1.5	1320 516	145.00
▪	0 - 150	0 - 6	40	1.6	0.01	.0005	0.03	rectangular	1320 517	145.00
▪	0 - 200	0 - 8	50	2.0	0.01	.0005	0.03	rectangular	1320 519	185.00
▪	0 - 300	0 - 12	65	2.5	0.01	.0005	0.03	none	1320 522	235.00
<b>With DATA VARIABLE, with extra long cross points (40 mm)</b>										
▪	0 - 150	0 - 6	40	1.6	0.01	.0005	0.03	round 1.5	1320 518	395.00

More information on 1320 518 on page 48



1998720

1998501

1997501

### Accessories


	Order no.	List price EUR
Battery, 3V-Lithium, CR 2032	0220 704	3.90
Data cable DATA VARIABLE to digimatic	1998 501	64.00
Data cable DATA VARIABLE to RS232	1997 501	50.00
Data cable DATA VARIABLE to USB	1998 720	72.00



## 1326 DIGI-MET® Pocket calipers IP67



DIN  
862

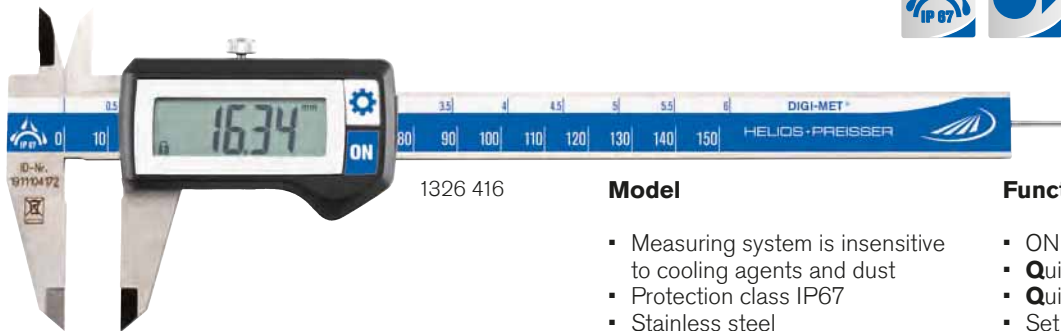

1326 416

### Model

- Measuring system is insensitive to cooling agents and dust
- Protection class IP67
- Stainless steel
- LCD display 11 mm
- DIN 862
- Housing and operating keys have an excellent chemical resistance
- Locking screw
- Inside cross points
- Four way measurement with measuring ranges 150 and 200 mm
- Three way measurement with measuring range 300 mm

### Functions

- ON / OFF
- Quick-Start**
- Quick-Lock** (key lock)
- Set to zero at any point
- mm / inch switching
- PRESET-Function (setting a numerical value)

### Delivery

- Plastic case



Video  
electronic

	Measuring range		Jaw length		Reading		Error limit	Depth gauge	Order no.	List price EUR
	mm	inch	mm	inch	mm	inch				
▪	0 - 150	0 - 6	40	1.6	0.01	.0005	0.03	round 1.5	1326 416	159.00
▪	0 - 150	0 - 6	40	1.6	0.01	.0005	0.03	rectangular	1326 417	159.00
▪	0 - 200	0 - 8	50	2.0	0.01	.0005	0.03	rectangular	1326 418	225.00
▪	0 - 300	0 - 12	65	2.5	0.01	.0005	0.03	none	1326 422	285.00

### With carbide-tipped measuring jaws

▪	0 - 150	0 - 6	40	1.6	0.01	.0005	0.03	round 1.5	1326 914	343.00
---	---------	-------	----	-----	------	-------	------	-----------	----------	--------

### Accessories

Battery, 3V-Lithium, CR 2032

### Order no.


0220 704

### List price

EUR

3.90

## 0220 Additional depth measuring base



### Model

- Stainless steel
- Bridge length: 75 mm
- Dimensions: 75 x 6.5 mm

	Order no.	List price EUR
	0220 705	22.40



# HELIOS · PREISSER

## 1326 DIGI-MET® Pocket calipers IP67 with data output



1

### Model

- Measuring system is insensitive to cooling agents and dust
- Protection class IP67
- Stainless steel
- LCD display 7.5 mm
- DIN 862
- Locking screw
- Inside cross points
- Four way measurement

### Functions

- ON / OFF
- **Quick-Start**
- **Quick-Lock** (key lock)
- Set to zero at any point
- mm / inch switching
- Variable data output RS 232 + Digimatic + USB

### Delivery

- Plastic case

✕	Measuring range		Jaw length		Reading		Error limit	Depth gauge	Order no.	List price
	mm	inch	mm	inch	mm	inch	mm			EUR
▪	0 - 150	0 - 6	40	1.6	0.01	.0005	0.03	round 1.5	1326 516	159.00
▪	0 - 150	0 - 6	40	1.6	0.01	.0005	0.03	rectangular	1326 517	159.00
▪	0 - 200	0 - 8	50	2.0	0.01	.0005	0.03	rectangular	1326 518	235.00



1998720

1997501

1998501

### Accessories

	Order no.	List price
		EUR
Battery, 3V-Lithium, CR 2032	0220 704	3.90
Data cable DATA VARIABLE to RS232	1997 501	50.00
Data cable DATA VARIABLE to digimatic	1998 501	64.00
Data cable DATA VARIABLE to USB	1998 720	72.00



= QuickLock



= QuickStart



= Waterproof acc. IP



= Data output



= DIN