




1334 / 1335 DIGI-MET® Workshop calipers



1



1334 522

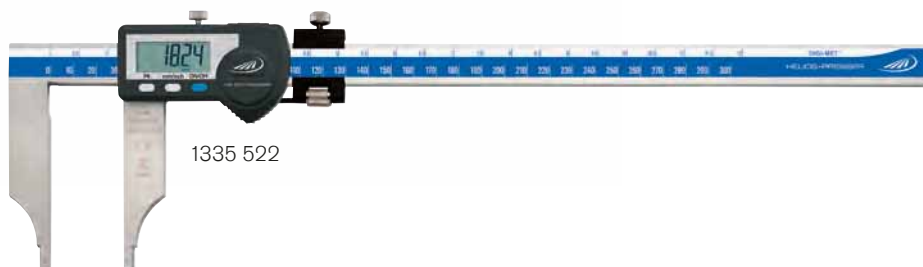

1335 522

Model

- Stainless steel
- Inductive measuring system, resistant to damp and sweat
- DIN 862
- LCD display:
 - 10 mm with measuring range 300 mm;
 - 12.5 mm from measuring range 500 mm
- Locking screw

Functions

- ON / OFF
- **Quick-Start**
- **Quick-Lock** (key lock)
- Set to zero at any point
- mm / inch switching
- PRESET-Function (setting a numerical value)
- Variable data output RS 232 + Digimatic + USB

Delivery

- Wooden case

Icon	Measuring range		Jaw length		Reading		Stepped jaws	Error limit	Order no.	List price
	mm	inch	mm	inch	mm	inch				
Without fine adjustment										
▪	0 - 300	0 - 12	90	3.5	0.01	.0005	10	0.03	1334 522	369.00
▪	0 - 500	0 - 20	125	5.0	0.01	.0005	20	0.03	1334 528	518.00
▪	0 - 800	0 - 31	150	6.0	0.01	.0005	20	0.04	1334 532	905.00
▪	0 - 1000	0 - 39	150	6.0	0.01	.0005	20	0.04	1334 534	1071.00
With fine adjustment										
▪	0 - 300	0 - 12	90	3.5	0.01	.0005	10	0.03	1335 522	422.00
▪	0 - 500	0 - 20	125	5.0	0.01	.0005	20	0.03	1335 528	596.00
▪	0 - 800	0 - 31	150	6.0	0.01	.0005	20	0.04	1335 532	973.00
▪	0 - 1000	0 - 39	150	6.0	0.01	.0005	20	0.04	1335 534	1118.00



1998720 1997501 1998501

Accessories

	Order no.	List price
Battery, 3V-Lithium, CR 2032	0220 704	3.90
Data cable DATA VARIABLE to USB	1998 720	72.00
Data cable DATA VARIABLE to RS232	1997 501	50.00
Data cable DATA VARIABLE to Digimatic	1998 501	64.00



HELIOS · PREISSER

1342 / 1343 DIGI-MET® Workshop calipers IP65



1



Model

- Stainless steel
- Inductive measuring system, protection class IP65
- DIN 862
- LCD display:
 - 10 mm with measuring range 300 mm;
 - 12.5 mm from measuring range 500 mm
- Locking screw

Functions

- ON / OFF
- **Quick-Start**
- **Quick-Lock** (key lock)
- Set to zero at any point
- mm / inch switching
- PRESET-Function (setting a numerical value)
- Variable data output RS 232 + Digimatic + USB

Delivery

- Wooden case

Icon	Measuring range		Jaw length		Reading		Stepped jaws	Error limit	Order no.	List price
	mm	inch	mm	inch	mm	inch				
Without fine adjustment										
▪	0 - 300	0 - 12	90	3.5	0.01	.0005	10	0.03	1342 522	396.00
▪	0 - 500	0 - 20	125	5.0	0.01	.0005	20	0.03	1342 528	731.00
▪	0 - 800	0 - 31	150	6.0	0.01	.0005	20	0.04	1342 532	1012.00
▪	0 - 1000	0 - 39	150	6.0	0.01	.0005	20	0.04	1342 534	1259.00
With fine adjustment										
▪	0 - 300	0 - 12	90	3.5	0.01	.0005	10	0.03	1343 522	452.00
▪	0 - 500	0 - 20	125	5.0	0.01	.0005	20	0.03	1343 528	788.00
▪	0 - 800	0 - 31	150	6.0	0.01	.0005	20	0.04	1343 532	1068.00
▪	0 - 1000	0 - 39	150	6.0	0.01	.0005	20	0.04	1343 534	1314.00



1998720

1997501

1998501

Accessories

	Order no.	List price
Battery, 3V-Lithium, CR 2032	0220 704	3.90
Data cable DATA VARIABLE to USB	1998 720	72.00
Data cable DATA VARIABLE to RS232	1997 501	50.00
Data cable DATA VARIABLE to digimatic	1998 501	64.00



0224 / 0225 DIGI-MET® Workshop calipers long version



1



0224 736



0225 736

Model

- Stainless steel
- LCD display 10 mm
- Locking screw
- Without knife points
- Factory standard
- Stepped jaws: 30 mm

Functions

- ON / OFF
- Set to zero at any point
- mm / inch switching
- Hold
- Data output Opto RS 232
- PRESET-Function (setting a numerical value)

Delivery

- Wooden case

Icon	Measuring range		Jaw length		Reading		Error limit	Order no.	List price EUR
	mm	inch	mm	inch	mm	inch	mm		
Without fine adjustment									
▪	0 - 1500	0 - 59	200	8.0	0.01	.0005	0.1	0224 734	2421.00
▪	0 - 2000	0 - 79	200	8.0	0.01	.0005	0.12	0224 736	2934.00
With fine adjustment									
▪	0 - 1500	0 - 59	200	8.0	0.01	.0005	0.1	0225 734	2552.00
▪	0 - 2000	0 - 79	200	8.0	0.01	.0005	0.12	0225 736	3029.00



0996705



0996701

Accessories

	Order no.	List price EUR
Battery, 3V-Lithium, CR 2032	0220 704	3.90
Data cable opto to RS232	0996 701	77.00
Data cable opto to USB	0996 705	147.00