

software CD (included)



1D MANUAL HEIGHT GAGE (WITHOUT AIR CUSHION) **CODE DHG-C420**

♦///S/ZE→ PLUS MADE IN EUROPE



DHG

DHG-C420

- Set 9 reference pointsProbe can be moved quickly by hand
- Touch buttons
- LED display with backlight
- Measurement results can be sent to Excel/Word, equivalent to keyboard input



hand wheel



measure height between measuring point and datum point



maximum, minimum, TIR measurement

Δ


calculate difference between two measured values

Ø

measure diameter and center of shafts



calculate average value of two measured values

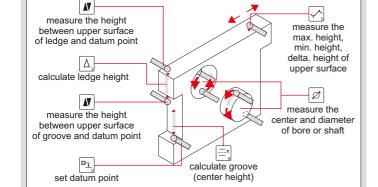

Unit: mm Ø8

Ø4mm ruby ball probe (included)

STANDARD DELIVERY

Main unit	1 pc
Ø4mm ruby ball probe	1 pc
Calibration block	1 pc
AC/DC adapter	1 pc
Software and USB cable	1 pc

SPECIFICATION

0. 200701.	
Measuring range	0~406mm
Accuracy (at 20°C)	8µm
Repeatability	3µm
Resolution	0.1mm, 0.01mm, 0.001mm (selectable)
Data output	USB
Measuring force	0.75N, 1N, 1.25N, 1.5N (selectable)
Power supply	AC/DC adapter
Working temperature	10°C~40°C
Weight	21kg

OPTIONAL ACCESSORY

Transmitter	7306-100
Receiver	7306-2
Rechargeable battery	ISHH-V-BATTERY
Probe	ISHH-V-C2A ISHH-V-C4A ISHH-V-R4 ISHH-V-R5B ISHH-V-R10 ISHH-V-P1

To be continued